

MODEL NO: S-01-07





Sequence valve is used to sequence hydraulic elements as per requirement.

HNV make sequence valve provides fine operations for work supports to achieve flatness.

OPERATING PRESSURE	10~70 Bar
MAX. OPERATING TEMPERATURE	100°C
RANGE OF ADJUSTMENT FOR SEQUENCE	10~70 Bar

## EXTERNAL DIMENSTIONS:

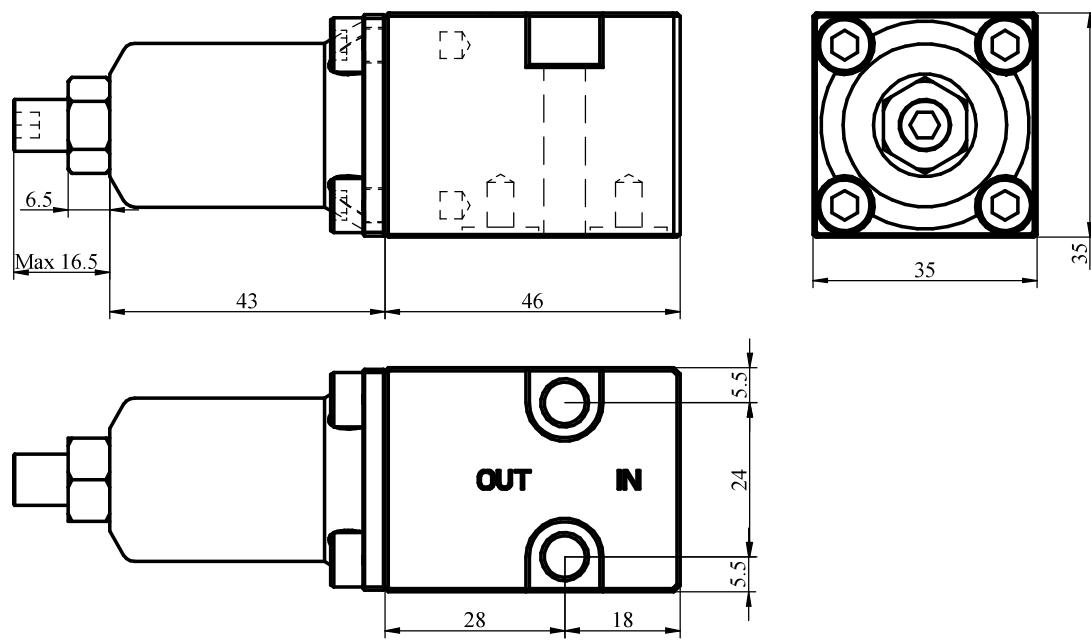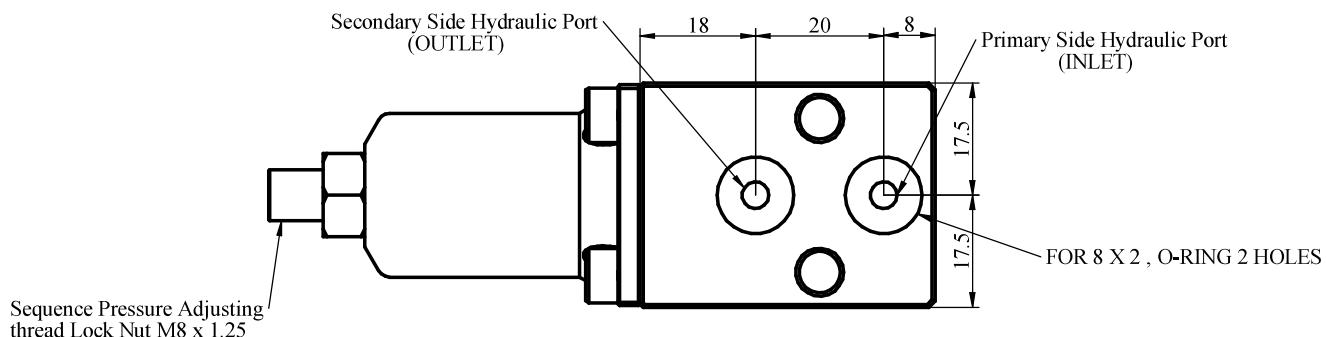

All dimensions are in mm